

ET & UT TYPE CORE

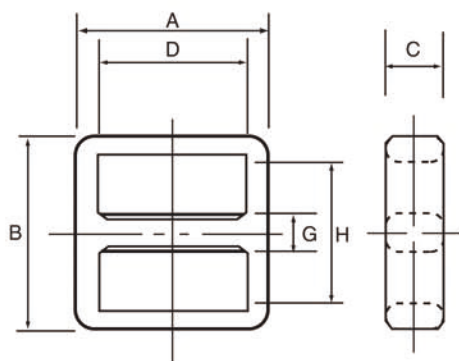


Fig 1

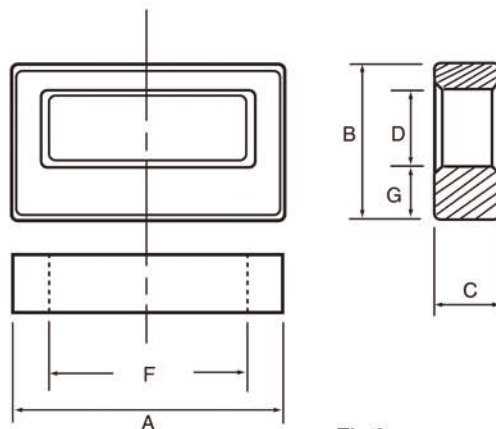


Fig 2

Dimensions and Magnetic Parameters

AL: UNIT nH

CORES SERIES	Fig	Dimensions (mm)						Le	Ae	Ve	NP1	N05	N07	N10
		B	A	C	D	G	F/H	mm	mm ²	mm ³	AL ±25%	AL ±25%	AL ±25%	AL ±30%
ET20	1	20.50±0.5	20.50±0.5	4.40±0.3	16.50±0.5	4.00±0.25	16.50±0.5	51.2	17.6	900	1070	2140	3000	4280
ET24	1	24.40±0.5	24.40±0.5	4.00±0.3	19.60±0.5	4.00±0.25	19.60±0.5	61.3	17.6	1080	890	1785	2500	3570
ET28	1	28.45±0.7	28.45±0.7	5.00±0.3	22.45±0.7	5.00±0.25	22.45±0.7	71.1	27.6	1960	1215	2430	3400	4150
ET35	1	35.30±0.7	35.30±0.5	7.50±0.3	27.30±0.5	7.50±0.35	27.30±0.7	87.0	58.0	5050	2070	4140	5800	8280
UT20	2	20.80±0.5	14.20±0.5	4.60±0.25	7.60±0.3	4.20±0.20	16.20±0.5	53.8	12.0	646	700	1400	1950	2800

AL Values are measured at 100KHz 100mv 1Ts.