


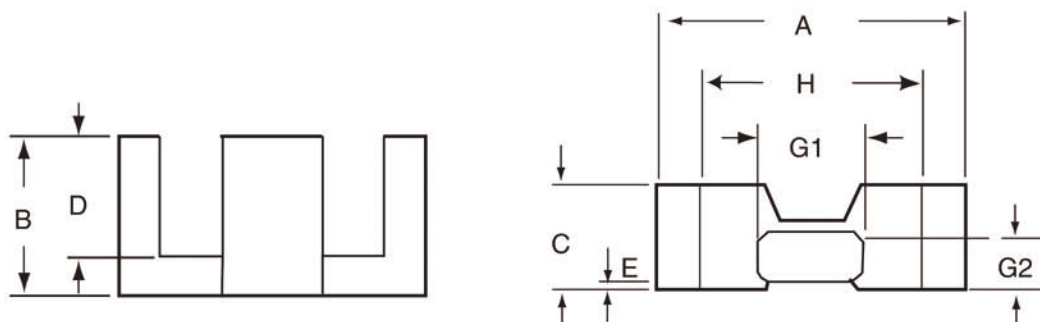

Dimensions and Magnetic Parameters

AL: UNIT nH

CORES SERIES	Dimensions (mm)								C1 mm ⁻¹	Le mm	Ae mm ²	Ve mm ³	NP1 AL ±25%
	A	B	C	D	E	G1	G2	H min					
EFD 9.5	9.5±0.3	4.75±0.15	2.3±0.15	2.95±0.20		4.00±0.15	1.20±0.10	6.80	3.23	22.08	3.13	69	140
EFD 10	10.5±0.3	5.20±0.10	2.7±0.10	3.75±0.15	0.20	4.55±0.20	1.45±0.05	7.65±0.25	3.29	23.70	7.20	171	500
EFD 12	12.5±0.3	6.20±0.10	3.5±0.20	4.55±0.20	0.20	5.40±0.15	2.0±0.10	9.00±0.25	2.50	28.50	11.40	325	700
EFD 15	15±0.40	7.50±0.20	4.65±0.20	5.5±0.25	0.20	5.30±0.15	2.4±0.10	10.55	2.27	34.00	15.00	510	700
EFD 20	20±0.55	10.0±0.20	6.65±0.20	7.7±0.25	0.17	8.90±0.20	3.5±0.15	14.80	1.52	47.00	31.00	1460	1200
EFD 20L	20±0.55	11.5±0.20	6.65±0.20	9.3±0.20	0.17	8.90±0.20	3.5±0.15	14.80	1.68	52.00	31.00	1612	1200
EFD 25	25±0.65	12.5±0.25	9.10±0.25	9.3±0.30	0.60	11.4±0.20	5.2±0.20	18.10	0.98	57.00	58.00	3300	2000
EFD 30	30±0.80	15.0 ^{-0.10} _{+0.40}	9.10±0.25	11.2 ^{-0.10} _{+0.40}	0.75	14.5±0.25	4.8±0.20	21.65	0.99	68.00	69.00	4700	2000

AL Values are measured at 10 KHz. 10 mv 0.35m/m 2uew 100Ts.