


CT TYPE CORE

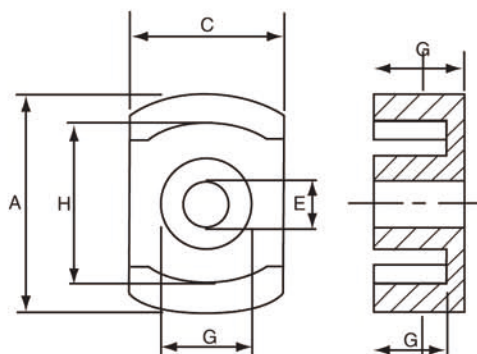

PT TYPE CORE

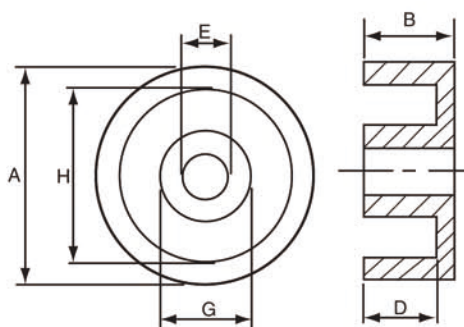


Fig. 1

POT TYPE CORE

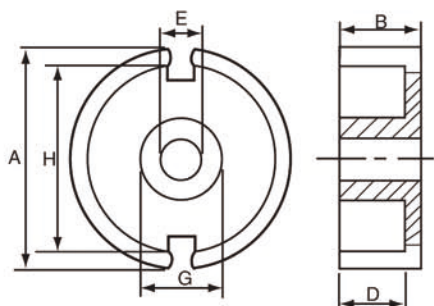


Fig. 2

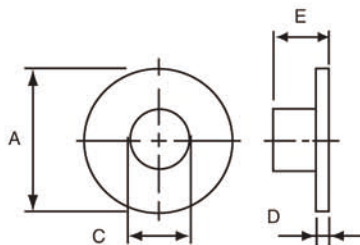


Fig. 3

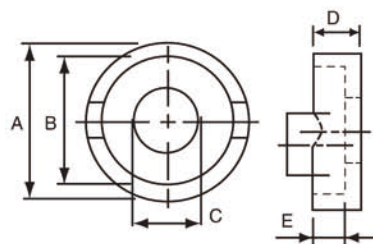


Fig. 4

Dimensions and Magnetic Parameters

AL: UNIT nH

CORES SERIES	Fig.	Dimensions (mm)								Magnetic dimensions			AL (nH/N) ² ±25%
		A	B	C	D	E	G	H	C1 Min	Le mm	Ae mm ²	Ve mm ³	NP1
NP1 POT14*4.6	2	14.00 ^{+0.50} _{-0.40}	4.60±0.20		3.40±0.20	3.00 Nomi	6.00 Max	11.60 Min	0.71	21.20	29.90	628	1300
NP1 POT18*11	2	18.00 ^{+0.50} _{-0.40}	5.30±0.15		3.70±0.20	3.80±0.20	7.40±0.15	13.40±0.35	0.59	25.80	43.30	1120	
NP1 CT23*5.5	1	22.90±0.45	5.54±0.20	15.10±0.20	3.78±0.20	5.00±0.20	9.30±0.20	18.30±0.35	2.29	29.60	12.90	382	2500
NP1 PT23*5.5		22.90±0.45	5.54±0.15		3.78±0.20	5.00±0.20	9.30±0.20	18.30±0.35	0.46	28.50	61.00	1738	2500
NP2 T3.9*2.2	3	3.90±0.20	2.20±0.20	1.30±0.10	0.50±0.15								
NP2 POT4*1.6	4	4.00±0.30	3.00±0.15	1.20±0.15	1.20±0.15	1.20±0.15							

AL Values are measured at 10 KHz. 10 mv 100Ts.